



湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KACR-M18-7
Relief valve


尺寸图
Dimension

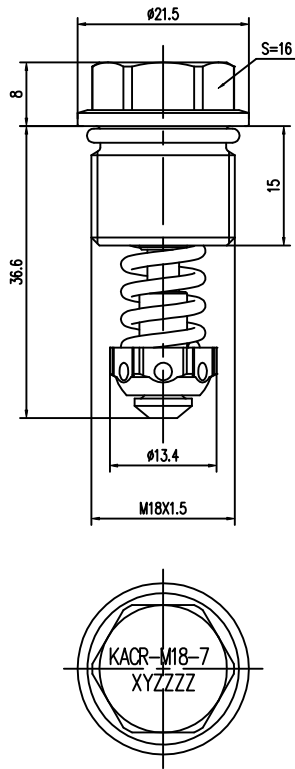

液压原理图
Hydraulic Diagram



压力曲线图
Pressure Characteristic Curve

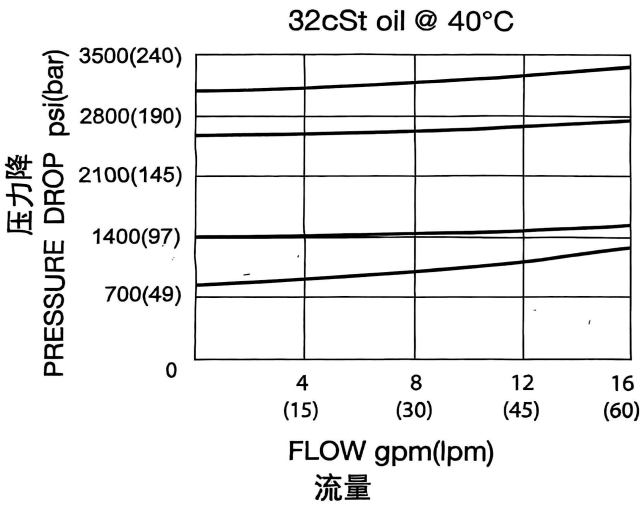

湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KACR-M18-7
Relief valve

技术参数TECHNICAL DATA

1. 额定压力: 350Bar

2. 额定流量: 60L/min

3. 调压范围: 20-70bar
 设定压力: 50bar, Q=5L/min

4. 插孔: VH002

5、使用温度范围: -40° F to +250° F
 (-40° C to +120° C)

5、油液: Mineral-based fluids
 with viscosities of
 7.4 to 420 cSt. (矿物油粘度)
1. Rated Pressure: 350Bar

2. Rated Flow: 60L/min

3. Pressure Setting Range: 20-70bar
 Setting Pressure: 50bar, Q=5L/min

4. Port: VH002


5. Operating temp: -40° F to +250° F
 (-40° C to +120° C)

6. Fluids: Mineral-based fluids
 with viscosities of
 7.4 to 420 cSt. (矿物油粘度)

孔型图

Hole Pattern Drawing


VH002插孔

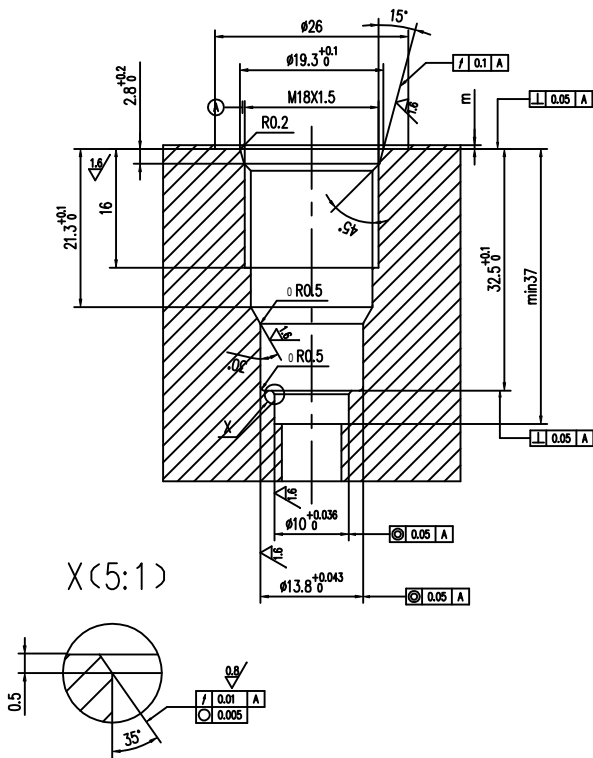

湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KACR-M18-7
Relief valve

订货代号 TO ORDER

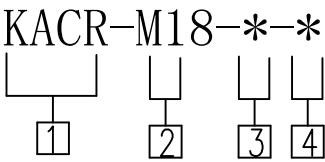

1 公司代号
KACR= 溢流阀
Relief valve

2 规格 Size
M18=M18 规格

3 弹簧调压范围 Spring Ranges
7=20-70Bar

4 设定压力 Setting In Bar
空白 Blank= 预设定 Preset
例 Example:150=150bar
固定设置值 psi (bar) Q=5 L/min