


湖南凯恩利液压 Hunan KEL Hydraulic

比例溢流阀 KBY08-26-0-N-12ER
Proportional relief valve


尺寸图

Dimension

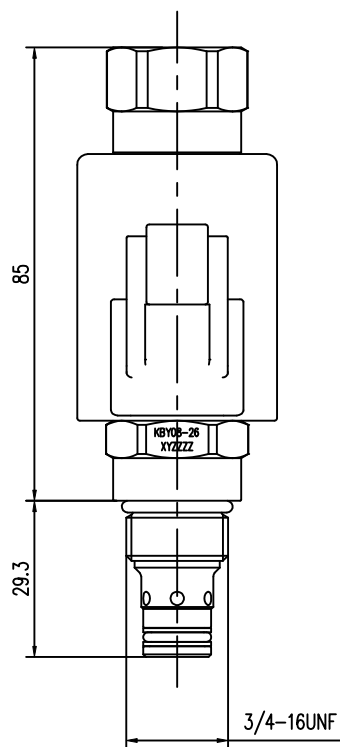


液压原理图

Hydraulic Diagram



性能曲线图

Performance Characteristic Curve

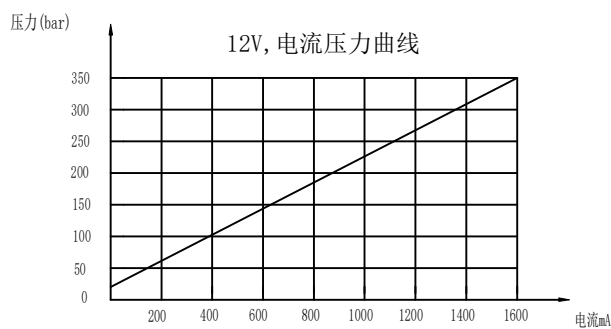

湖南凯恩利液压 Hunan KEL Hydraulic


比例溢流阀 KBY08-26-0-N-12ER
Proportional relief valve

技术参数TECHNICAL DATA

- | | |
|---------------------------------------|--|
| 1. 额定流量: 30L/Min
2口额定压力: 350Bar | 1. Rated Flow: 30L/Min
Port 2Rated Pressure: 350Bar |
| 2. 电磁阀电压: 12V±15% DC
功率: 22W | 2. Solenoid Valve Voltage: 12V±15% DC
Power: 22W |
| 3. 电磁阀接插件: DT04-2P,
防水性能等级: IP=69K | 3. Solenoid Valve Connector: DT04-2P,
Ingress Protection Rating: IP=69K |
| 4. 比例溢流阀压力范围: 15-350 bar,
滞环≤5% | 4. Proportional relief valve pressure range: 15-350 bar,
hysteresis ≤5% |
| 5. 使用温度范围: -20℃+90℃ | 5. Operating temp: -20℃+90℃ |
| 6. 插孔: VC08-2 孔型 | 6. Port: VC08-2 |

孔型图


Hole Pattern Drawing

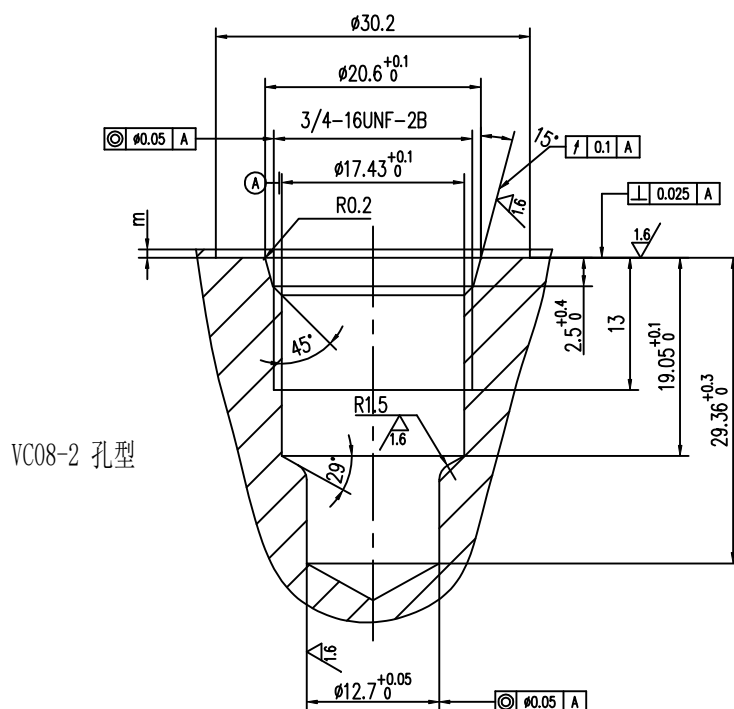

湖南凯恩利液压 Hunan KEL Hydraulic

比例溢流阀 KBY08-26-0-N-12ER
Proportional relief valve

订货代号 TO ORDER

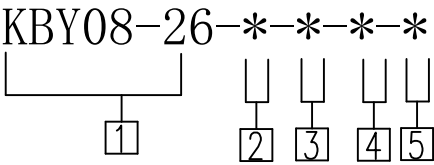

1 公司代号
KBY08-26= 比例溢流阀
Proportional relief valve

2 0 =只定插件
Cartridge Valve

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶

4 电压 Rated Voltage
12 =DC 12V
24 =DC 24V

5 电线圈连接 Coil Connection
ER= Deutsch Connector
(Water-proof Coil)
德意志插座(防水线圈) IP69
DG=Hirschmann 三插
DL= Double Lead 双线