



湖南凯恩利液压 Hunan KEL Hydraulic

分流集流阀 KFSES-XAN
Flow Divider and Combiner Valve

尺寸图
Dimension

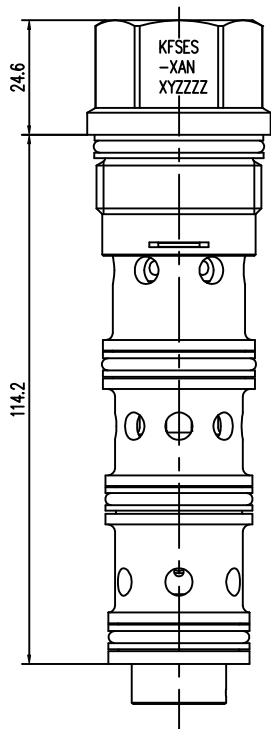

液压原理图
Hydraulic Diagram



性能曲线图
Performance Characteristic Curve

Split	Input Flow		Rated Accuracy	Maximum Possible Flow Variation
50:50	Max	30 gpm	±2.5%	14.2 - 15.8 gpm
	Rated	120 L/min		57 - 63 L/min
	Min	6 gpm	±4.5%	2.7 - 3.3 gpm
	rated	23 L/min		10.5 - 12.5 L/min
Synchronizing Flow				0.90 - 1.75 gpm
				3.4 - 6.6 L/min

The maximum possible variation is at 5000 psi (350 bar) differential between legs with the high pressure leg being the higher flow in dividing mode and the lower flow in combining mode.

湖南凯恩利液压 Hunan KEL Hydraulic

分流集流阀 KFSES-XAN
Flow Divider and Combiner Valve

技术参数TECHNICAL DATA

1. 额定流量: 23-120L/min
额定压力: 350Bar

1. Rated Flow:23-120L/min
Rated Pressure:350Bar
2. 流量分配比: 50 : 50

2. Flow Distribution Ratio: 50 : 50
3. 插孔: T-33A


3. Port: T-33A
4. 最大流量分流精度: 50%±4.5%

4. Flow Division Accuracy at Maximum Flow: 50%±4.5%
5. 最小流量分流精度: 50%±2.5%

5. Flow Division Accuracy at Minimum Flow:50%±2.5%

孔型图


Hole Pattern Drawing

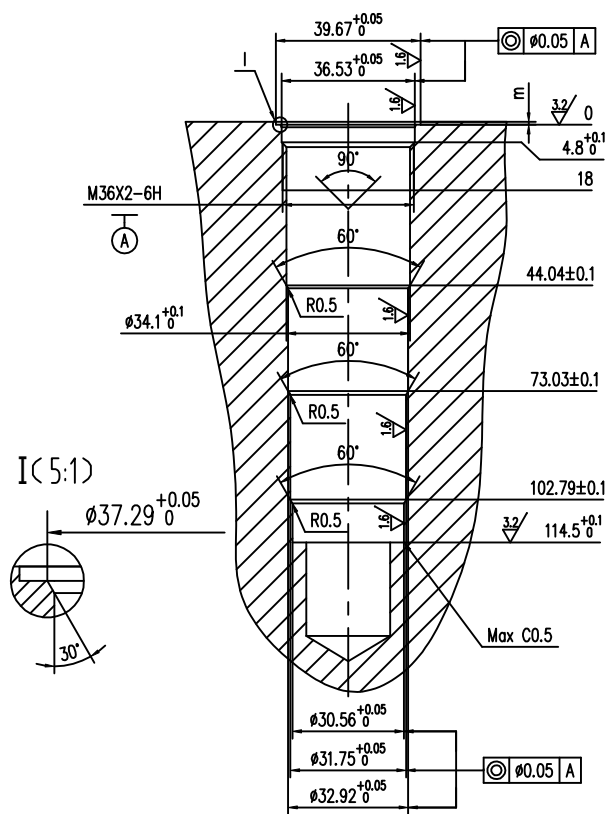

湖南凯恩利液压 Hunan KEL Hydraulic

分流集流阀 KFSES-XAN
Flow Divider and Combiner Valve

订货代号 TO ORDER



1 公司代号
KFSES= 分流集流阀
Flow Divider and Combiner Valve

2 控制方式 Contol
X=不可调

3 流量分配比 Flow Distribution Ratio
A=50/50

4 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶