



湖南凯恩利液压 Hunan KEL Hydraulic

流量控制阀 KLPFC-XHN
Flow Control Valve


尺寸图
Dimension

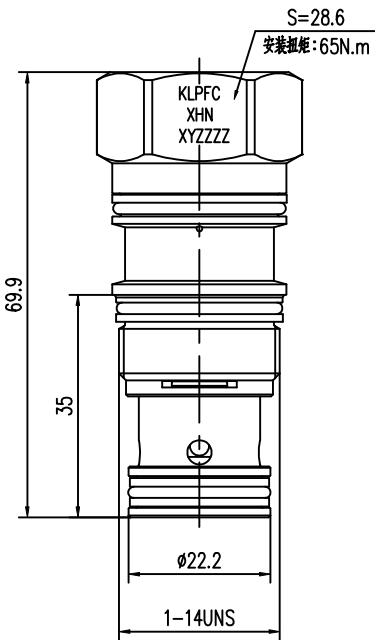

液压原理图
Hydraulic Diagram



压力曲线图
Pressure Characteristic Curve

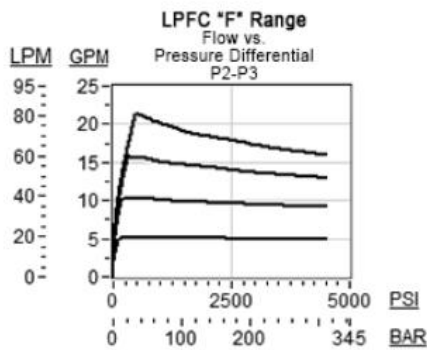

湖南凯恩利液压 Hunan KEL Hydraulic

流量控制阀 KLPFC-XHN
Flow Control Valve

技术参数TECHNICAL DATA

1. 额定流量: 80L/min
额定压力: 350Bar

2. 压差: 14Bar

3. 插孔: T-2A

4. 所有端口都可以接受
5000 psi (350 bar)的压力。
1. Rated Flow:80L/min
Rated Pressure:350Bar


2. Pressure difference: 14Bar

3. Port: T-2A

4. All ports can withstand a pressure
of 5,000 psi (350 bar)

孔型图


Hole Pattern Drawing

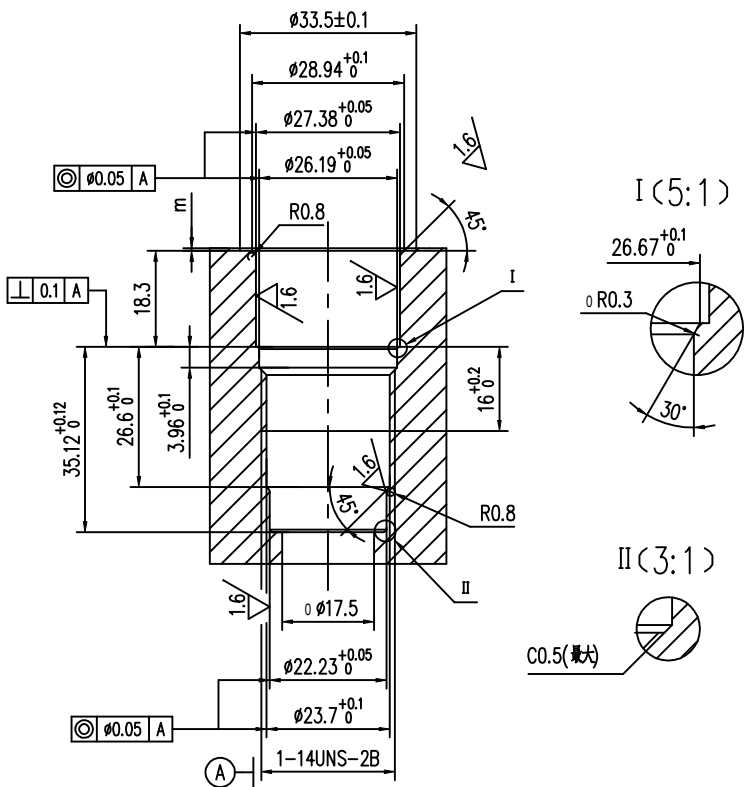

湖南凯恩利液压 Hunan KEL Hydraulic

流量控制阀 KLPFC-XHN
Flow Control Valve

订货代号 TO ORDER



1 公司代号
KLPFC= 流量控制阀
Flow Control Valve

2 控制方式 Contol
X=不可调
A=外部4-SAE油口
G=慢作用导压

3 压差 Pressure difference
D=50 psi (3,5 bar)
F=100 psi (7 bar)
G=150 psi (10,5 bar)
H=200 psi (14 bar)

4 油封 Seal Kits
E=EPDM
N=丁腈橡胶
F=氟橡胶