



湖南凯恩利液压 Hunan KEL Hydraulic

水电磁阀 KSZ10-26-12DG
Water Solenoid Valve


尺寸图
Dimension

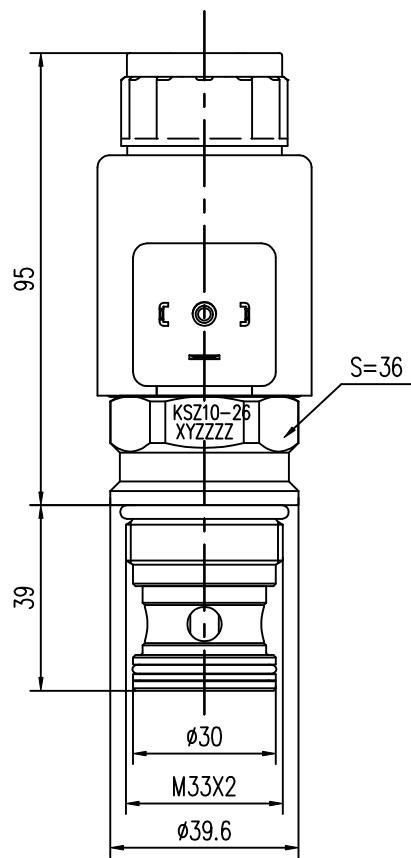

液压原理图
Hydraulic Diagram



性能曲线图
Performance Characteristic Curve

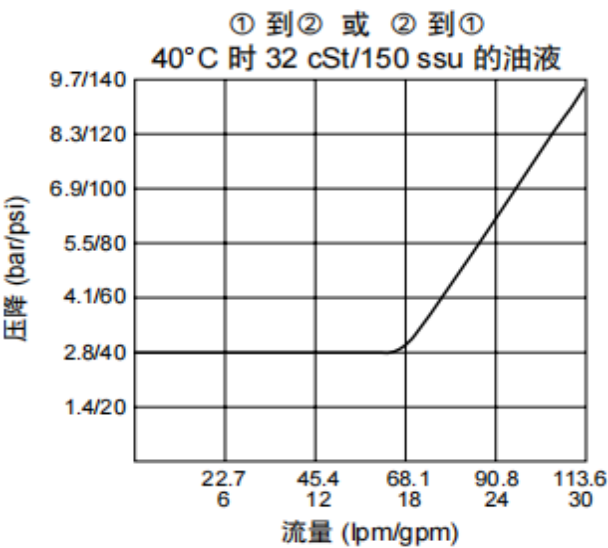

湖南凯恩利液压 Hunan KEL Hydraulic


水电磁阀 KSZ10-26-12DG
Water Solenoid Valve

技术参数TECHNICAL DATA

- | | |
|--|---|
| 1. 额定流量: 30L/min
额定压力: 210Bar | 1. Rated Flow: 30L/min
Rated Pressure: 210Bar |
| 2. 电磁阀电压: DC12V±15%
功率: 30W | 2. Solenoid Valve Voltage: DC12V±15%
Power: 30W |
| 3. 使用温度范围: -20° C— +90° C | 3. Operating temp: -20° C— +90° C |
| 4. 电磁阀接插件: DIN43650,
防水性能等级: IP=65K | 4. Solenoid Valve Connector: DIN43650,
Ingress Protection Rating: IP=65K |
| 5. 插孔: SZV12-2 | 5. Port: SZV12-2 |
| 6. 介质: 水 | 6. Fluid: Water |

孔型图


Hole Pattern Drawing

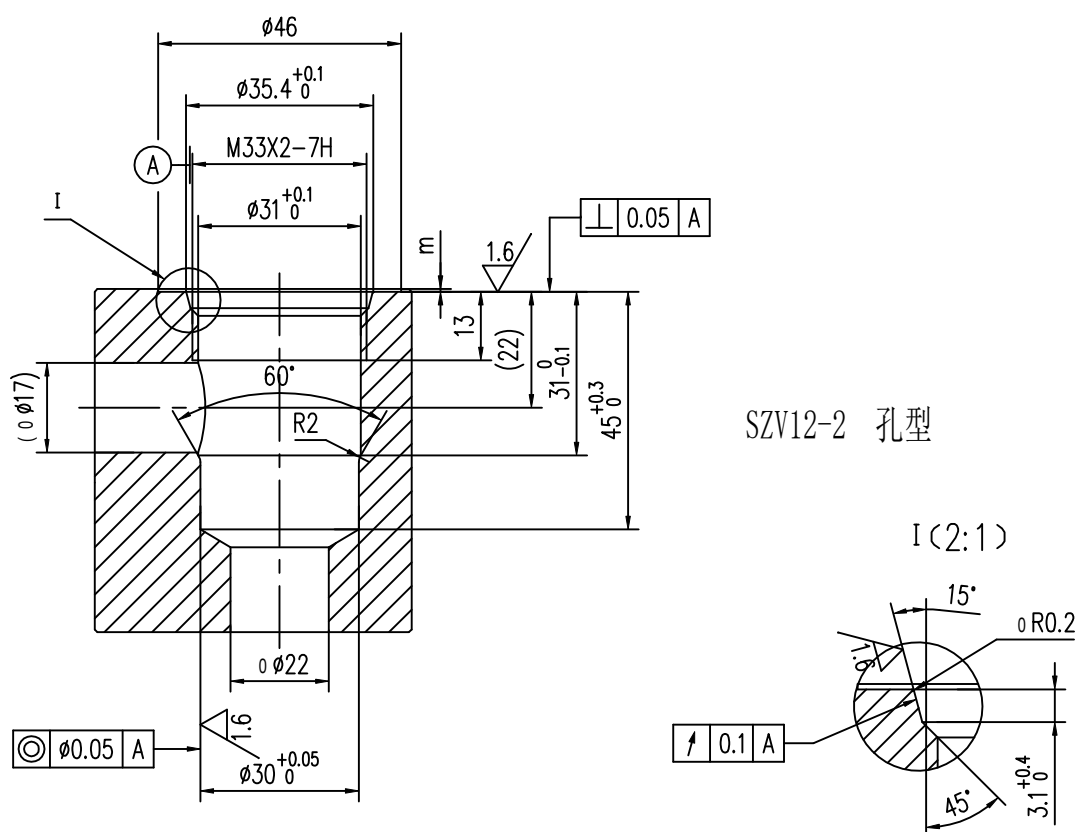

湖南凯恩利液压 Hunan KEL Hydraulic

水电磁阀 KSZ10-26-12DG
Water Solenoid Valve

订货代号 TO ORDER

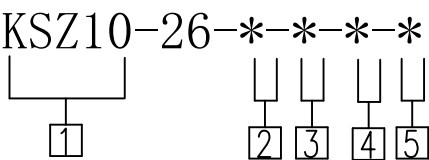

1 公司代号
KSZ10= 水电磁阀
Water Solenoid Valve

4 0 =只定插件
Cartridge Valve

2 电压 Rated Voltage
12 =DC 12V
24 =DC 24V

5 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶

3 电线圈连接 Coil Connection
DG=Hirschmann 三插
ER= Deutsch Connector
(Water-proof Coil)
德意志插座(防水线圈) IP69
DL= Double Lead 双线