



湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KACR-M18-21
Relief valve


尺寸图
Dimension

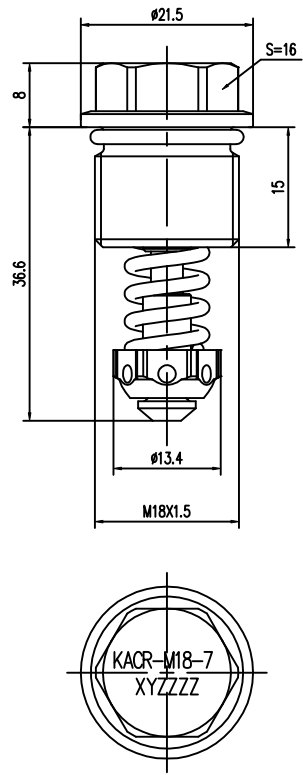

液压原理图
Hydraulic Diagram



压力曲线图
Pressure Characteristic Curve

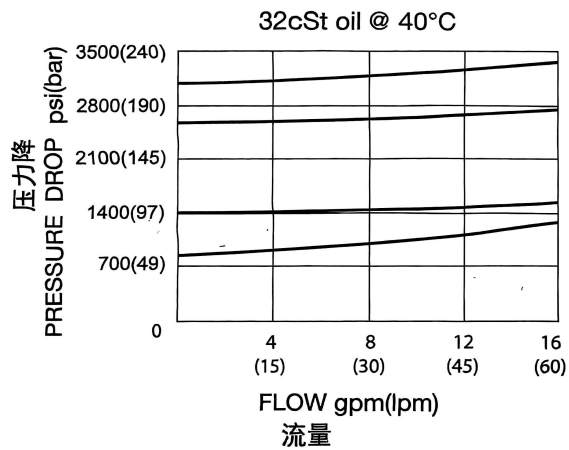

湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KACR-M18-21
Relief valve

技术参数TECHNICAL DATA

1. 额定压力: 350Bar

2. 额定流量: 60L/min

3. 调压范围: 130-210bar
设定压力: 180bar, Q=5L/min

4. 插孔: VH002

5、使用温度范围: -40° F to +250° F
(-40° C to +120° C)

5、油液: Mineral-based fluids
with viscosities of
7.4 to 420 cSt. (矿物油粘度)
- 1.Rated Pressure: 350Bar

2.Rated Flow: 60L/min

3.Pressure Setting Range: 130-210bar
Setting Pressure: 180bar, Q=5L/min


4.Port: VH002

5.Operating temp: -40° F to +250° F
(-40° C to +120° C)

6.Fluids: Mineral-based fluids
with viscosities of
7.4 to 420 cSt. (矿物油粘度)

孔型图


Hole Pattern Drawing

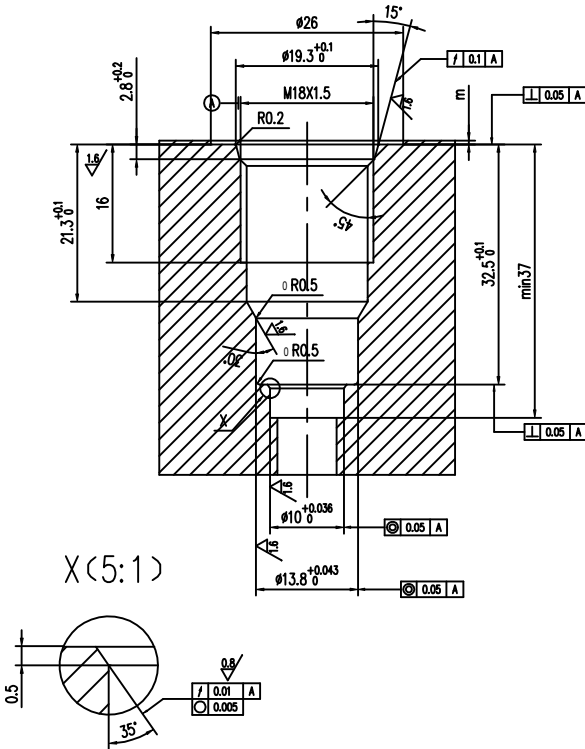

湖南凯恩利液压 Hunan KEL Hydraulic

溢流阀 KACR-M18-21
Relief valve

订货代号 TO ORDER

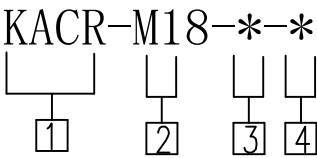

1 公司代号
KACR= 溢流阀
Relief valve

2 规格 Size
M18=M18 规格

3 弹簧调压范围 Spring Ranges
21=130-210bar

4 设定压力 Setting In Bar
空白 Blank= 预设设定 Preset
例 Example: 150=150bar
固定设置值 psi(bar) Q=5 L/min