



湖南凯恩利液压 Hunan KEL Hydraulic

两位两通比例电磁阀 KSP10-20-0-N
2-Position, 2-Way Proportional Solenoid Valve



尺寸图
Dimension

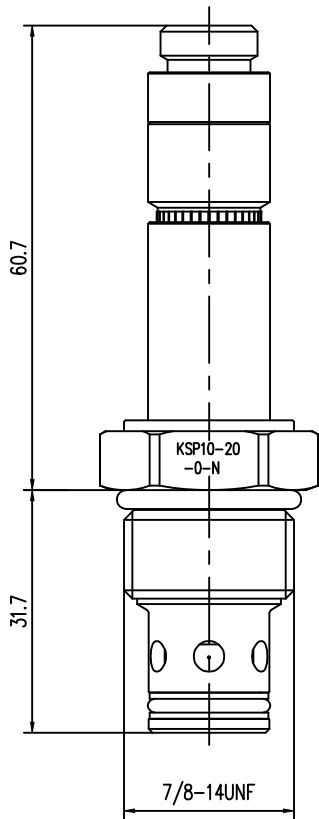

液压原理图
Hydraulic Diagram

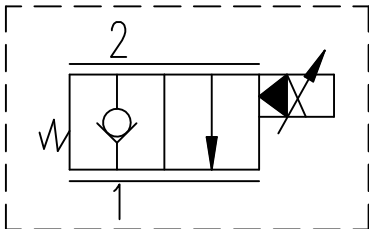

性能曲线图
Performance Characteristic Curve

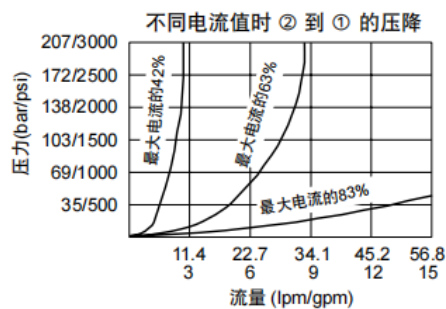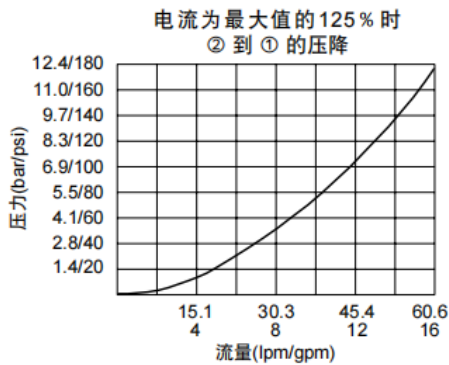

湖南凯恩利液压 Hunan KEL Hydraulic

两位两通比例电磁阀 KSP10-20-0-N
2-Position, 2-Way Proportional Solenoid Valve

技术参数TECHNICAL DATA

1. 最大流量: 60L/min
额定压力: 250Bar

1. Maximum Flow Rate:60L/min
Rated Pressure:250Bar
2. 泄露量: 在 250 bar (3625 psi) 时,
最大为 5滴/分钟;

2. Leakage:maximum 5 drops per
minute at 250 bar (3625 psi)
3. 使用温度范围: -40° C— 120° C


3. Operating temp: -40° C— 120° C
4. 插孔: VC10-2

4. Port: VC10-2
5. 介质: 粘度介于7.4~420cSt (50~2000sus)
的矿物油或具有润滑作用的合成油

5. Fluid: Mineral oil or lubricating synthetic
7.4-420 oil with viscosity between
cSt (50-2000 sus)

孔型图


Hole Pattern Drawing

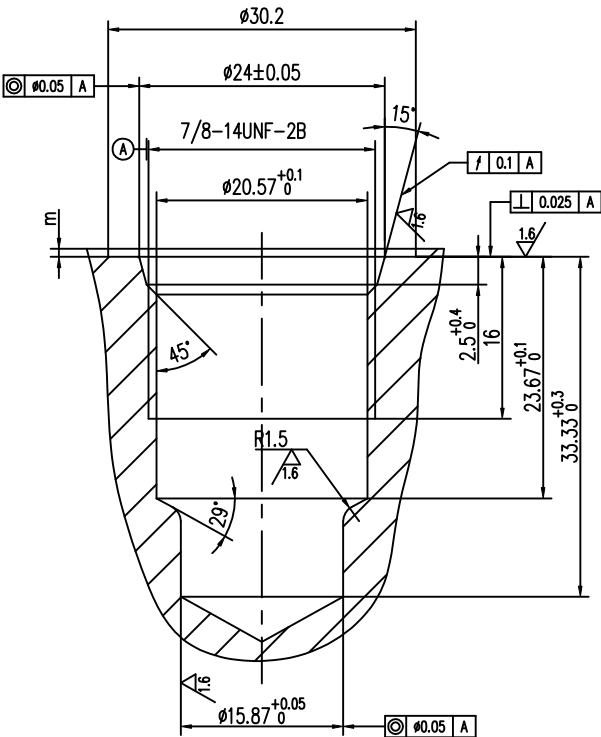

湖南凯恩利液压 Hunan KEL Hydraulic

两位两通比例电磁阀 KSP10-20-0-N
2-Position, 2-Way Proportional Solenoid Valve

订货代号 TO ORDER

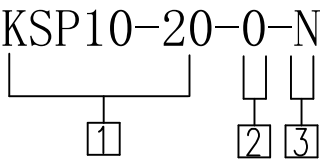

1 公司代号
KSP10-20= 两位两通比例电磁阀
2-Position, 2-Way Proportional Solenoid Valve

2 0 =只定插件
Cartridge Valve

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶