



湖南凯恩利液压 Hunan KEL Hydraulic

两位两通比例电磁阀 KSP08-20-0-N
2-Position, 2-Way Proportional Solenoid Valve



尺寸图
Dimension

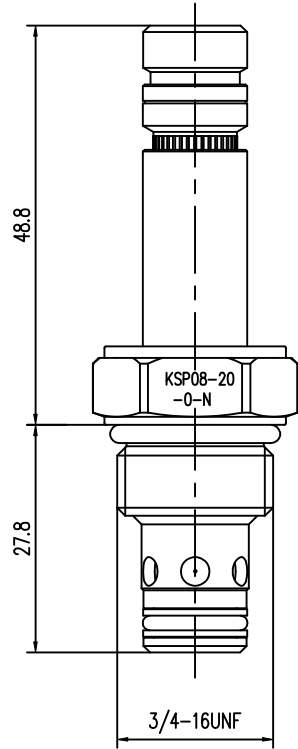

液压原理图
Hydraulic Diagram



性能曲线图
Performance Characteristic Curve

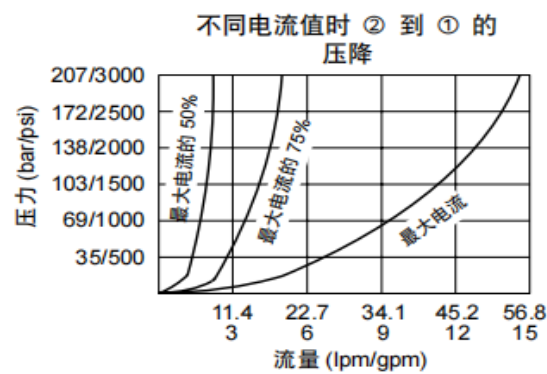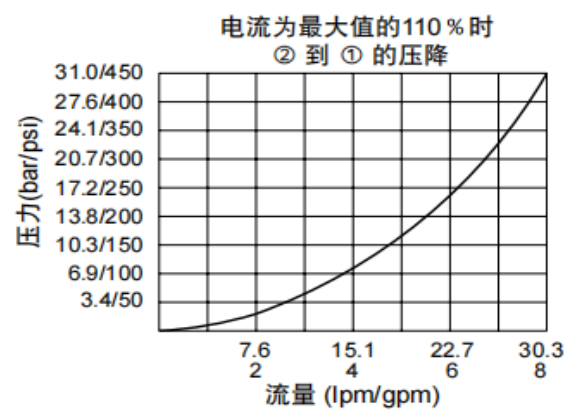

湖南凯恩利液压 Hunan KEL Hydraulic


两位两通比例电磁阀 KSP08-20-0-N
2-Position, 2-Way Proportional Solenoid Valve

技术参数TECHNICAL DATA

- | | |
|---|---|
| 1. 最大流量: 22L/min
额定压力: 250Bar | 1. Maximum Flow Rate:22L/min
Rated Pressure:250Bar |
| 2. 泄露量: 在 250 bar (3625 psi) 时,
最大为 5滴/分钟; | 2. Leakage:maximum 5 drops per
minute at 250 bar (3625 psi) |
| 3. 使用温度范围: -40° C— 120° C | 3. Operating temp: -40° C— 120° C |
| 4. 插孔: VC08-2 | 4. Port: VC08-2 |
| 5. 介质: 粘度介于7.4~420cSt (50~2000sus)
的矿物油或具有润滑作用的合成油 | 5. Fluid: Mineral oil or lubricating synthetic
7.4 - 420 oil with viscosity between
cSt (50 - 2000 sus) |

孔型图


Hole Pattern Drawing

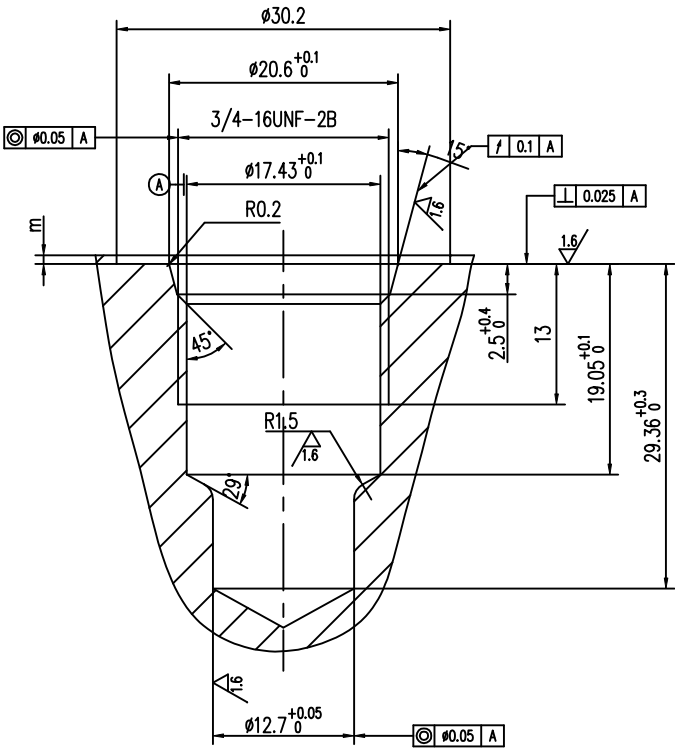

湖南凯恩利液压 Hunan KEL Hydraulic

两位两通比例电磁阀 KSP08-20-0-N
2-Position, 2-Way Proportional Solenoid Valve

订货代号 TO ORDER



1 公司代号
KSP08-20= 两位两通比例电磁阀
2-Position, 2-Way Proportional Solenoid Valve

2 0 =只定插件
Cartridge Valve

3 油封 Seal Kits
N=丁腈橡胶
F=氟橡胶